

产品标准书 SPECIFICATIONFOR APPROVAL	编 号 Document No. DRAAW108H/0-2022
------------------------------------	--------------------------------------

## 目录

1. 电容器及介质分类 .....	3
2. 产品结构.....	4
3. 产品规格型号命名规则 .....	5
4. 产品容量范围 .....	6
0201 (0603) 尺寸 .....	6
0402 (1005) 尺寸 .....	7
0603 (1608) 尺寸 .....	9
0805 (2012) 尺寸 .....	11
1206 (3216) 尺寸.....	13
1210 (3225) 尺寸 .....	15
5. 产品尺寸 .....	16
6. 技术要求和测试条件.....	17
7. 产品包装 .....	28
8. MLCC 使用注意事项 .....	33


## 1. 电容器及介质分类 Types of Capacitor and Dielectric Material

※COG: 此类介质材料的电容器为 I 类电容器, 包括常规、中高压 COG 产品。此类产品电性能稳定, 几乎不随温度、电压和时间的变化而变化。适用于低损耗, 稳定性要求高的电路中, 如滤波器、谐振器和计时电路中。

※COG: The capacitor of this kind dielectric material is considered as Class I capacitor, including general capacitor and high frequency COG capacitor. The electrical properties of COG capacitor are the most stable one and have little change with temperature, voltage and time. They are suited for applications where low-losses and high-stability are required, such as filters, oscillators, and timing circuits.

※X7R、X5R、X6S、X7T、X7S: 此类介质材料的电容器为 II 类电容器, 具有较高的介电常数, 容量比 I 类电容器高, 具有较稳定的温度特性, 适用于容量范围广, 稳定性要求不高的电路中, 如隔直、耦合、旁路、鉴频等电路中。

※ X7R、X5R、X6S、X7T、X7S: material is a kind of material has high dielectric constant. The capacitor made of this kind material is considered as Class II capacitor whose capacitance is higher than that of class I . These capacitors are classified as having a semi-stable temperature characteristic and used over a wide temperature range, such in these kinds of circuits, DC-blocking, decoupling, bypassing, frequency discriminating etc.

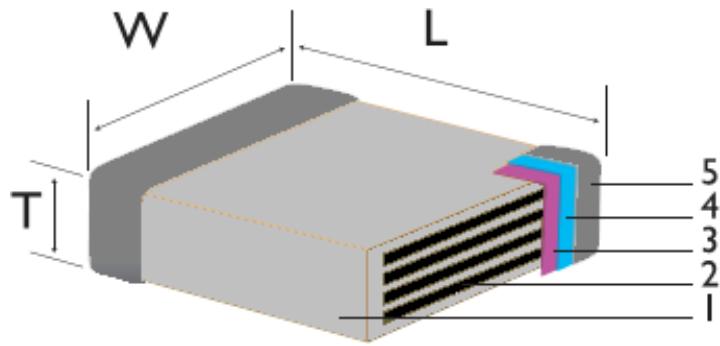**2. 产品结构 Product Frame**

序号 No:	名称 Name
1	陶瓷介质 Ceramic dielectric
2	内电极 Inner electrode
3	外电极 Outer electrode
4	镍层 Nickel
5	锡层 Tin

**●型号規格表示方法 HOW TO ORDER**

<u>0805</u>	<u>CG</u>	<u>3</u>	<u>101</u>	<u>J</u>	<u>500</u>	<u>N</u>	<u>T</u>
①	②	③	④	⑤	⑥	⑦	⑧

**※说明 NOTES:**
**①尺寸 DIMENSIONS**

单位(unit): inch/mm

尺寸规格 Size 寸	0402	0603	0805	1206	1210	1808	1812	2220	2225	3035
长x宽 (L x W) inch	0.04x0.0 2	0.06x0.0 3	0.08x0.0 5	0.12x0.0 6	0.12x0.1 0	0.18x0.0 8	0.18x0.1 2	0.22x0.2 0	0.22x0.2 5	0.3x0.35
长x宽 (L x W) mm	1.00x0.5 0	1.60x0.8 0	2.00x1.2 5	3.20x1.6 0	3.20x2.5 0	4.50x2.0 0	4.50x3.2 0	5.70x5.0 0	5.70x6.3 0	7.60x9.0 0

**②介质种类DIELECTRICSTYLE**

介质种类 (Dielectric Code)	CG	D	B	E	G	S	F
介质材料 (Dielectric)	COG	X5R	X7R	X7T	X7S	X6S	YSV

**③**

total character
NO. OF total character (102=1000=4)

**④标称容量NOMINALCAPACITANCE**

单位(unit): pF

表示方式 (Express Method)	实际值 (Actual Value)	注: 头两位效字为有效数字, 第三位數字为0的个数; R为小数点 Note: the first two digits are significant; third digit denotes number of zeros; R=decimal point.
0R5	0.5	
1R0	1.0	
102	$10 \times 10^2$	
224	$22 \times 10^4$	
...	...	

**⑤容量误差CAPACITANCETOLERANC**

代码 (code)	B	C	D	F	G	J	K	M	Z
误差 (toleranc e)	$\pm 0.1$ pF	$\pm 0.25$ pF	$\pm 0.5$ pF	$\pm 1.0\%$	$\pm 2.0\%$	$\pm 5\%$	$\pm 10\%$	$\pm 20\%$	+80%~20%

备注: B、C、D级误差适用于容量≤10pF的产品

Note: These capacitance tolerance B, C, D are just applicable the capacitance that equals to or less than 10pF.

## ⑥额定电压 RATED VOLTAGE

单位(unit):V

表示方式 (Express Method)	实际值 (Actual Value)	注: 头两位數字为有效數字, 第三位數字为 0 的的个数 R 为小数点。
6R3	6.3	Note: the first two digits are significant; third digit denotes number of zeros; R=decimal point
500	50x10 <sup>0</sup>	
201	20x10 <sup>1</sup>	
102	10x10 <sup>2</sup>	
...	...	

## ⑦端头材料TERM INAL MATERIAL STYLES

端头类别(Termination Styles)	表示方式(Express Method)
纯银端头(Silver Solderable Termination)	S
纯铜端头(Copper Solderable Termination)	C
三层电镀端头(Nicke 1 Barrier Termination)	N

## ⑧包装方式PACKAGE STYLES

B	T
散包装(Bulk bag)	编带包装(Taping Package)

## ●温度系数/特性Temperature Coefficient /Characteristics

介质种类 Dielectric	参考温度点 Reference Temperature Point	标称温度系数 Temperature Coefficient	工作温度范围 Operation Temperature Range
COG	20° c	0±30PPM/° c	-55° c ~ +125° c
X5R	20° c	±15%	-55° c ~ +85° c
X7R	20° c	±15%	-55° c ~ +125° c
X7T	20° c	+22/-33%	-55° c ~ +125° c
X7S	20° c	±22%	-55° c ~ +125° c
Y5V	20° c	-80%+30%	-25° c ~ +85° c
X6S	20° c	±22%	-55° c ~ +105° c

备注: I类电容器标称温度系数和允许偏差是采用温度20° c和85° c和之间的电容量变化来确定的, 而II类电容器标称温度系数是按照工作范围之间的电容量对20° c的电容变化来确定的。

Note: Nominal temperature coefficient and allowed tolerance of class I are decided by the changing of the capacitance between 20° C and 85° C. Nominal temperature coefficient of class II are decided by the temperature of 20° C

产品标准书 SPECIFICATION FOR APPROVAL	编 号 Document No.
	DRAAW108H/0-2022

#### 4. 产品容量范围 Product Capacitance Range

##### 0201(0603)尺寸

Cp/V <sub>DC</sub>	COG系列		X7R系列		X5R系列				X6S系列				X7S系列		X7T系列		
	50	25	50	25	25	16	10	6.3	25	16	10	6.3	50	25	16	10	6.3
0R1	Z	Z															
0R2	Z	Z															
0R3	Z	Z															
0R4	Z	Z															
0R5	Z	Z															
0R6	Z	Z															
0R7	Z	Z															
0R8	Z	Z															
0R9	Z	Z															
1R0	Z	Z															
1R1	Z	Z															
1R2	Z	Z															
1R3	Z	Z															
1R5	Z	Z															
1R6	Z	Z															
1R8	Z	Z															
2R0	Z	Z															
2R2	Z	Z															
2R4	Z	Z															
2R7	Z	Z															
3R0	Z	Z															
3R3	Z	Z															
3R6	Z	Z															
3R9	Z	Z															
4R0	Z	Z															
4R3	Z	Z															
4R7	Z	Z															
5R0	Z	Z															
5R1	Z	Z															
5R6	Z	Z															
6R0	Z	Z															
6R2	Z	Z															
6R8	Z	Z															
7R0	Z	Z															
7R5	Z	Z															
8R0	Z	Z															
8R2	Z	Z															
9R0	Z	Z															
9R1	Z	Z															
100	Z	Z															
220	Z	Z															
330	Z	Z															
390	Z	Z															
470	Z	Z															
680	Z	Z															
101	Z	Z															
181		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
221		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
241		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
271		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
331		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
471		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
681		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
751		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
102		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
152		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
222		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
332		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
472		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
682		Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
103			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
153			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
223			Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
473				Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
863				Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
104				Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
224					Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
474					Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z
105						Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z	Z

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

产品标准书 SPECIFICATIONFOR APPROVAL	编 号 Document No.												
	DRAAW108H/0-2022												

**0402 (1005) 尺寸**

Cp/V <sub>DC</sub>	0402(1005)																										
	COG系列		X7R系列				X6S系列				X5R系列				X7S系列				X7T系列								
Cp/V <sub>DC</sub>	50	25	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	25	16	10	6.3	4
0R1	A	A																									
0R2	A	A																									
0R3	A	A																									
0R4	A	A																									
0R5	A	A																									
0R6	A	A																									
0R7	A	A																									
0R8	A	A																									
0R9	A	A																									
1R0	A	A																									
1R1	A	A																									
1R2	A	A																									
1R3	A	A																									
1R5	A	A																									
1R6	A	A																									
1R8	A	A																									
2R0	A	A																									
2R2	A	A																									
2R4	A	A																									
2R7	A	A																									
3R0	A	A																									
3R3	A	A																									
3R6	A	A																									
3R9	A	A																									
4R0	A	A																									
4R3	A	A																									
4R7	A	A																									
5R0	A	A																									
5R1	A	A																									
5R6	A	A																									
6R0	A	A																									
6R2	A	A																									
6R8	A	A																									
7R0	A	A																									
7R5	A	A																									
8R0	A	A																									
8R2	A	A																									
9R0	A	A																									
9R1	A	A																									
100	A	A																									
120	A	A																									
150	A	A																									
180	A	A																									
200	A	A																									
220	A	A																									
270	A	A																									
300	A	A																									
330	A	A																									
390	A	A																									
470	A	A																									
560	A	A																									
680	A	A																									
820	A	A																									

		0402(1005)																						
Cp/VDC	COG系列	X7R系列				X6S系列				X5R系列				X7S系列				X7T系列						
		50	25	50	25	16	10	6	50	25	16	10	6	50	25	16	10	6	25	16	10	6.3	4	
101	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
121	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
151	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
181	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
201	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
221	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
271	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
331	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
391	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
471	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
561	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
681	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
821	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
102	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
152		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
182		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
222		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
272		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
332		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
472		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
562		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
682		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
103		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
153		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
183		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
223		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
273		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
333		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
393		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
473		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
563		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
683		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
104		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
154		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
184		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
224		A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A	A A						A A	A A	A A	A A	A A	
274					A		A A	A A	A A	A A	A A	A A	A A						A	A A	A A	A A	A A	
334					A		A A	A A	A A	A A	A A	A A	A A						A	A A	A A	A A	A A	
474					A		A A	A A	A A	A A	A A	A A	A A						A	A A	A A	A A	A A	
684					A		A A	A A	A A	A A	A A	A A	A A						A	A A	A A	A A	A A	
105					A		A A	A A	A A	A A	A A	A A	A A						A		A A	A A	A A	
225									A		A A	A A	A A											

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

**0603(1608)尺寸**

0603(1608)														X6S系列				X5R系列				X7S系列				X7T系列					
Cp/V <sub>DC</sub>	COG系列					X7R系列					X6S系列				X5R系列				X7S系列				X7T系列								
	500	250	200	100	50	25	250	200	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	4	
0R2	c	c	c	c	c	c																									
0R3	c	c	c	c	c	c																									
0R4	c	c	c	c	c	c																									
0R5	c	c	c	c	c	c																									
0R6	c	c	c	c	c	c																									
0R7	c	c	c	c	c	c																									
0R8	c	c	c	c	c	c																									
0R9	c	c	c	c	c	c																									
1R0	c	c	c	c	c	c																									
1R1	c	c	c	c	c	c																									
1R2	c	c	c	c	c	c																									
1R3	c	c	c	c	c	c																									
1R5	c	c	c	c	c	c																									
1R6	c	c	c	c	c	c																									
1R8	c	c	c	c	c	c																									
2R0	c	c	c	c	c	c																									
2R2	c	c	c	c	c	c																									
2R4	c	c	c	c	c	c																									
2R7	c	c	c	c	c	c																									
3R0	c	c	c	c	c	c																									
3R3	c	c	c	c	c	c																									
3R6	c	c	c	c	c	c																									
3R9	c	c	c	c	c	c																									
4R0	c	c	c	c	c	c																									
4R3	c	c	c	c	c	c																									
4R7	c	c	c	c	c	c																									
5R0	c	c	c	c	c	c																									
5R1	c	c	c	c	c	c																									
5R6	c	c	c	c	c	c																									
6R0	c	c	c	c	c	c																									
6R2	c	c	c	c	c	c																									
6R8	c	c	c	c	c	c																									
7R0	c	c	c	c	c	c																									
7R5	c	c	c	c	c	c																									
8R0	c	c	c	c	c	c																									
8R2	c	c	c	c	c	c																									
9R0	c	c	c	c	c	c																									
9R1	c	c	c	c	c	c																									
100	c	c	c	c	c	c																									
120	c	c	c	c	c	c																									
150	c	c	c	c	c	c																									
180	c	c	c	c	c	c																									
200	c	c	c	c	c	c																									
220	c	c	c	c	c	c																									
270	c	c	c	c	c	c																									
300	c	c	c	c	c	c																									
330	c	c	c	c	c	c																									
390	c	c	c	c	c	c																									
470	c	c	c	c	c	c																									
560	c	c	c	c	c	c																									
680	c	c	c	c	c	c																									
820	c	c	c	c	c	c																									
101	c	c	c	c	c	c	c	c	c	c	c	c	c	c																	
121	c	c	c	c	c	c	c	c	c	c	c	c	c	c																	
151	c	c	c	c	c	c	c	c	c	c	c	c	c	c																	
181	c	c	c	c	c	c	c	c	c	c	c	c	c	c																	
201	c	c	c	c	c	c	c	c	c	c	c	c	c	c																	

产品标准书										编 号 Document No.									
SPECIFICATIONFOR APPROVAL										DRAAW108H/0-2022									

Cp/V <sub>DC</sub>	0603(1608)																													
	COG系列					X7R系列					X6S系列					X5R系列					X7S系列					X7T系列				
Cp/V <sub>DC</sub>	500	250	200	100	50	25	250	200	100	50	25	16	10	6	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	4
221	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
271	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
331	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
391	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
471	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
561	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
681	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
821	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
102	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
152	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
182	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
222	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
272	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
332	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
472	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
562	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
682	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
103	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
153	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
183	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
223	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
273	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
333	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
393	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
473	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
563	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
683	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
104	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
154	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
184	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
224	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
274	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
334	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
474	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
684	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
105	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
225	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
475	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
106	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		
226	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c		

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

产品标准书 SPECIFICATION FOR APPROVAL								编 号 Document No. DRAAW108H/0-2022											
-------------------------------------	--	--	--	--	--	--	--	--------------------------------------	--	--	--	--	--	--	--	--	--	--	--

0805(2012)尺寸

0805(2012)																																		
Cp/V <sub>DC</sub>	COG系列							X7R系列					X6S系列				X5R系列				X7S系列				X7T系列									
	630	500	250	100	50	25	16	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	100	50	25	16	10	6.3	25	16	10	6.3
0R2	B	B	B	B	B	B	B																											
0R3	B	B	B	B	B	B	B																											
0R4	B	B	B	B	B	B	B																											
0R5	B	B	B	B	B	B	B																											
0R6	B	B	B	B	B	B	B																											
0R7	B	B	B	B	B	B	B																											
0R8	B	B	B	B	B	B	B																											
0R9	B	B	B	B	B	B	B																											
1R0	B	B	B	B	B	B	B																											
1R1	B	B	B	B	B	B	B																											
1R2	B	B	B	B	B	B	B																											
1R3	B	B	B	B	B	B	B																											
1R5	B	B	B	B	B	B	B																											
1R6	B	B	B	B	B	B	B																											
1R8	B	B	B	B	B	B	B																											
2R0	B	B	B	B	B	B	B																											
2R2	B	B	B	B	B	B	B																											
2R4	B	B	B	B	B	B	B																											
2R7	B	B	B	B	B	B	B																											
3R0	B	B	B	B	B	B	B																											
3R3	B	B	B	B	B	B	B																											
3R6	B	B	B	B	B	B	B																											
3R9	B	B	B	B	B	B	B																											
4R0	B	B	B	B	B	B	B																											
4R3	B	B	B	B	B	B	B																											
4R7	B	B	B	B	B	B	B																											
5R0	B	B	B	B	B	B	B																											
5R1	B	B	B	B	B	B	B																											
5R6	B	B	B	B	B	B	B																											
6R0	B	B	B	B	B	B	B																											
6R2	B	B	B	B	B	B	B																											
6R8	B	B	B	B	B	B	B																											
7R0	B	B	B	B	B	B	B																											
7R5	B	B	B	B	B	B	B																											
8R0	B	B	B	B	B	B	B																											
8R2	B	B	B	B	B	B	B																											
9R0	B	B	B	B	B	B	B																											
9R1	B	B	B	B	B	B	B																											
100	B	B	B	B	B	B	B																											
120	B	B	B	B	B	B	B																											
150	B	B	B	B	B	B	B																											
180	B	B	B	B	B	B	B																											
200	B	B	B	B	B	B	B																											
220	B	B	B	B	B	B	B																											
270	B	B	B	B	B	B	B																											
300	B	B	B	B	B	B	B																											
330	B	B	B	B	B	B	B																											
390	B	B	B	B	B	B	B																											
470	B	B	B	B	B	B	B																											
560	B	B	B	B	B	B	B																											
680	B	B	B	B	B	B	B																											
820	B	B	B	B	B	B	B																											
101	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B				
121	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B				
151	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B				
181	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B				
201	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B				
221	B	B	B	B	B	B	B	B	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
271	B	B	B	B	B	B	B	B	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				

产品标准书												编 号 Document No.																		
SPECIFICATIONFOR APPROVAL												DRAAW108H/0-2022																		
	COG系列						X7R系列						X6S系列						X5R系列						X7T系列					
Cp/V <sub>DC</sub>	630	500	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	100	50	25	16	10	6.3	25	16	10	6.3	4
331	B	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D			
391		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D			
471		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D			
561		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D			
681		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D			
821		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D				
102		D	B	B	B	B	B	D/F	D/F	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D	B/D				
152		B	B	B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D			
182			B	B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
222			B	B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
272			B	B	B	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
332			D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
472			D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
562			D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
682			D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
103			D	D	D	D/F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
153						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
183						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
223						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
273						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
333						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
393						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
473						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
563						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
683						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
104						F	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
154						F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
184						F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
224						F	D/F	D	D	D	D	D/F	D	D	D	D	D	D	D	D	D	D	D	D	D	D				
274						D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D	D				
334						D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D	D/F	D	D	D	D	D				
474						D/F	D/F	D	D	D	D/F	D/F	D	D	D	D/F	D/F	D	D	D	D/F	D/F	D	D	D	D				
684						D	D/F	D/F	D	D	D/F	D/F	D	D	D	D/F	D/F	D	D	D	D/F	D/F	D	D	D	D				
105						F	D/F	D/F	D	D	F	D/F	D/F	D	D	F	D/F	D/F	D	D	F	D/F	D/F	D	F	D/F	D			
225						F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F				
475						F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F				
106						F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F				
226																														

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.



产品标准书	编 号 Document No.
SPECIFICATION FOR APPROVAL	DRAAW108H/0-2022

1206(3216)尺寸

1206 (3216)

DRAAW108H/0-2022

		1206 (3216)																																		
Cp/V <sub>dc</sub>		COG系列								X7R系列								X6S系列				X5R系列				X7S系列				X7T系列						
		2000	1000	630	500	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	250	100	50	25	16	10	6.3	4	
152		D	D	D	D	D	D	H	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
182		D	D	D	D	D	D	H	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
222		D	D	D	D	D	D	H	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
272		D	D	D	D	D	D	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
332		D	D	D	D	D	D	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
472		D	D	D	D	D	D	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
562		D	D	D	D	D	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
682		D	D	D	D	D	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
103		D	D	D	D	D	F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
153							H	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
183							F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
223							F	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
273							H	H	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
333							H	H	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
393							H	H	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
473							H	H	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
563							H	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
683							H	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
104							H	F	F	F	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
154							H	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
184							H	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
224							H	B	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	H	D	D	D	D	D	D	D	D	D
274							D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
334							D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D
474							F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
684							F/H	F/H	F	F	F	F	F/H	F	F	F	F	F	F	F	F	F	F	F	F	F	F/H	F/H	F	F	F	F	F	F	F	
105							H	F/H	F	F	F	F/H	F	F	F	F	F	F	F	F	F	F	F	F	F	H	F/H	F	F	F	F	F	F	F	F	F
205							F/H	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	F/H	E	E	E	E	E	E	E	E	E	E
225							H	F	F	F	F	H	F	F	F	F	H	F	F	F	F	F	F	F	F	H	F	F	F	F	F	F	F	F	F	F
475							H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
106							H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
226							H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
476							H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H

以上容量仅供参考，具体容量取决于使用要求。

Above capacitance for reference only, actual cap. Range depends on the standard products.

**1210(3225)尺寸**

1210 (3225)																																			
Cp/V <sub>x</sub>	COG系列					X7R系列						X6S系列				X5R系列				X7S系列						X7T系列									
	2000	1000	500	250	100	50	###	###	630	500	250	100	50	25	16	10	6.3	50	25	16	10	6.3	50	25	16	10	6.3	100	50	25	16	10	6.3	4	
100	D																																		
120	D																																		
150	D																																		
180	D																																		
200	D																																		
220	D																																		
270	D																																		
300	D																																		
330	D																																		
390	D																																		
470	D																																		
560	D																																		
680	D																																		
820	D																																		
101	D	D	D	D	D	D																													
121	F	D	D	D	D	D																													
151	F	D	D	D	D	D																													
181	F	D	D	D	D	D																													
201	F	D	D	D	D	D																													
221	F	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
271	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
331	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
391	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
471	D	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
561	F	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
681	F	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
821	F	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
102	F	D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
152		D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
182		D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
222		D	D	D	D	D	F	F	F	F	F	F	F	F	F	F	F	F																	
272		F	D	D	D	H	F	F	F	F	F	F	F	F	F	F	F	F																	
332			D	D	D	H	F	F	F	F	F	F	F	F	F	F	F	F																	
472			D	D	D	H	F	F	F	F	F	F	F	F	F	F	F	F																	
562							F	F	F	F	F	F	F	F	F	F	F	F																	
682							F	F	F	F	F	F	F	F	F	F	F	F																	
103							F	F	F	F	F	F	F	F	F	F	F	F																	
153							F	F	F	F	F	F	F	F	F	F	F	F																	
223							H	H	H	H	H	H	H	H	H	H	H	H																	
333							H	H	H	H	H	H	H	H	H	H	H	H																	
473							G	G	F	F	F	F	F	F	F	F	F	F																	
563								F	F	F	F	F	F	F	F	F	F	F																	
683								F	F	F	F	F	F	F	F	F	F	F																	
104								F	F	F	F	F	F	F	F	F	F	F																	
154								H	H	H	H	H	H	H	H	H	H	H																	
224								G	H	H	H	H	H	H	H	H	H	H																	
334									G																										
374									G																										
474									G	G	G	G	G	G	G	G	G	G																	
684									H	H	H	H	H	H	H	H	H	H																	
105									H	H	H	H	H	H	H	H	H	H																	
225									H	H	H	H	H	H	H	H	H	H																	
475										H/G	H	H	H	M	H/G	H	H	H																	
106											M	G	M	M	M	G	M	M																	
226											M	M	M	M	M	M	M	M																	
476											M	M	M	M	M	M	M	M																	
107																			M																

以上容量仅供参考，具体容量取决于使用要求。


Above capacitance for reference only, actual cap. Range depends on the standard products.

产品标准书 SPECIFICATION FOR APPROVAL	编 号 Document No.
	DRAAW108H/0-2022

## 5. 产品尺寸 Dimensions

规格: 0201、0402、0603、0805、1206、1210。

Chip Size: 0201,0402,0603,0805,1206 and 1210

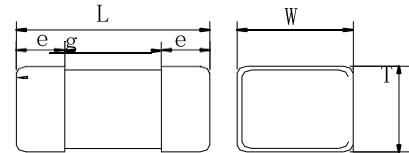

规格 Type	L (mm)	W (mm)	e (mm)	g min (mm)	T (mm) / 代码 Code	
0201	0.60±0.03	0.30±0.03	0.1~0.2	0.2	0.30±0.03	Z
0201* <sup>2</sup>	0.60-0.03/+0.1	0.30-0.03/+0.1	0.1~0.2	0.2	0.30-0.03/+0.1	Z
0402	1.00±0.10	0.50±0.10	0.15~0.3	0.4	0.50±0.10	A
0402* <sup>2</sup>	1.00-0.05/+0.2	0.50-0.05/+0.2	0.15~0.3	0.4	0.50-0.05/+0.2	A
0603	1.60±0.10	0.80±0.10	0.2~0.6	0.5	0.80±0.10	C
0603* <sup>1</sup>	1.60±0.20* <sup>1</sup>	0.80±0.20* <sup>1</sup>	0.2~0.6	0.5	0.80±0.20* <sup>1</sup>	C
0603* <sup>3</sup>	1.60-0/+0.3	0.80-0/+0.3	0.2~0.6	0.5	0.80-0/+0.3	C
0805	2.00±0.10	1.25±0.10	0.2~0.7	0.7	0.60±0.10	B
					0.85±0.10	D
					1.25±0.20	F
0805* <sup>1</sup>	2.00±0.20* <sup>1</sup>	1.25±0.20* <sup>1</sup>	0.2~0.7	0.7	0.60±0.10	B
					0.85±0.20	D
					1.25±0.20	F
1206	3.20±0.20	1.60±0.20	0.3~0.8	1.6	0.85±0.10	D
					1.00±0.10	E
					1.25±0.20	F
					1.60±0.20	H
1206* <sup>1</sup>	3.20±0.30* <sup>1</sup>	1.60±0.30* <sup>1</sup>	0.3~0.8	1.6	0.85±0.10	D
					1.00±0.10	E
					1.25±0.20	F
					1.60±0.30* <sup>1</sup>	H
1210	3.20±0.30	2.5±0.20	0.3~0.8	1.6	0.85±0.10	D
					1.25±0.20	F
					1.60±0.20	H
					2.00±0.20	G
					2.50±0.30	M
1210* <sup>1</sup>	3.20±0.40* <sup>1</sup>	2.5±0.30* <sup>1</sup>	0.3~0.8	1.6	0.85±0.10	D
					1.25±0.20	F
					1.60±0.30	H
					2.00±0.20	G
					2.50±0.30	M

\*<sup>1</sup> 标识该规格型号标识为 1uF 及以上规格产品尺寸。\*<sup>2</sup> 标识该规格型号标识为 100nF 及以上规格产品尺寸。\*<sup>3</sup> 标识该规格型号标识为 10uF 及以上规格产品尺寸。

产品标准书 SPECIFICATION FOR APPROVAL	编 号 Document No. DRAAW108H/0-2022
-------------------------------------	--------------------------------------

## 6. 技术要求和测试条件 Specification and Test Condition

### 6.1 外观 Appearance

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S	1/10L < L ≤ 1/8L, 1/10W < W ≤ 1/8W, 1/10T < T ≤ 1/8T (任意一项不符合, 均判定不合格) (None is acceptable, All judged unqualified)	目视检查 Visual inspection.

### 6.2 尺寸 Dimensions

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S	在要求的范围内 Within the specified dimensions	用千分尺 Using calipers on micrometer

### 6.3 容量 Capacitance

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	在要求的容值容差范围内 Within the specified tolerance A:±0.05pF; B:±0.1pF; C:±0.25pF; D:±0.5pF; J: ±5%	1.0±0.2Vrms, 1MHz±10% (C>1000 pF, 1.0±0.2Vrms, 1KHz±10%, )
X7R/X5R/X7T /X6S/X7S	在要求的容值容差范围内 Within the specified tolerance J: ±5%; K: ±10%; M: ±20%	1.0±0.2Vrms, 1KHz±10% (Cp>10uF, 0.5±0.1Vrms, 120±24Hz)

备注：测试温度：25°C ±3°C，测试湿度：<70%RH. 针对二类介质规格需去老化处理，条件：电容器在 150°C 热处理 1 小时，放置 48h 后进行测量。

产品标准书 SPECIFICATIONFOR APPROVAL	编 号 Document No. DRAAW108H/0-2022
------------------------------------	--------------------------------------

#### 6.4 损耗 Dissipation Factor

类型 Dielectrics	技术要求 Specification				测试条件 Testing Condition																																																																												
COG	Cp<30pF, Q≥400+20Cp; Cp≥30pF, Q≥1000				1.0±0.2Vrms,1MHz±10% ,25 ℃ (Cp>1000pF,1.0±0.2Vrms,1K Hz±10%)																																																																												
X7R/X5R/X7T /X6S/X7S	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">规格</th> <th style="text-align: center;"><math>U_R</math></th> <th style="text-align: center;">容量范围</th> <th style="text-align: center;">DF</th> </tr> </thead> <tbody> <tr> <td rowspan="2" style="text-align: center;">0201</td> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 0.47 \mu F</math></td> <td style="text-align: center;">≤10%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C \leq 0.01 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td rowspan="4" style="text-align: center;">0402</td> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 0.47 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C \geq 0.47 \mu F</math></td> <td style="text-align: center;">≤10%</td> </tr> <tr> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 0.1 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C &gt; 0.1 \mu F</math></td> <td style="text-align: center;">≤10%</td> </tr> <tr> <td rowspan="5" style="text-align: center;">0603</td> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 0.47 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C \geq 0.47 \mu F</math></td> <td style="text-align: center;">≤10.0%</td> </tr> <tr> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 0.1 \mu F</math></td> <td style="text-align: center;">≤5.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>0.1 \mu F &lt; C \leq 0.22 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C &gt; 0.22 \mu F</math></td> <td style="text-align: center;">≤10%</td> </tr> <tr> <td rowspan="4" style="text-align: center;">0805</td> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 1 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C &gt; 1 \mu F</math></td> <td style="text-align: center;">≤10.0%</td> </tr> <tr> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C \leq 0.47 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>C &gt; 0.47 \mu F</math></td> <td style="text-align: center;">≤10.0%</td> </tr> <tr> <td rowspan="4" style="text-align: center;">1206</td> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C &lt; 2.2 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>2.2 \mu F \leq C &lt; 47 \mu F</math></td> <td style="text-align: center;">≤10.0%</td> </tr> <tr> <td style="text-align: center;">≤25V</td> <td style="text-align: center;"><math>C &lt; 1 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> </tr> <tr> <td style="text-align: center;">&gt;25V</td> <td style="text-align: center;"><math>1 \mu F \leq C &lt; 47 \mu F</math></td> <td style="text-align: center;">≤10.0%</td> </tr> <tr> <td style="text-align: center;">1210</td> <td style="text-align: center; vertical-align: middle;">/</td> <td style="text-align: center;"><math>C &lt; 2.2 \mu F</math></td> <td style="text-align: center;">≤7.0%</td> <td style="text-align: center;"></td> </tr> <tr> <td></td> <td></td> <td style="text-align: center;"><math>2.2 \mu F \leq C &lt; 47 \mu F</math></td> <td style="text-align: center;">≤10.0%</td> <td style="text-align: center;"></td> </tr> </tbody> </table>	规格	$U_R$	容量范围	DF	0201	≤25V	$C \leq 0.47 \mu F$	≤10%	>25V	$C \leq 0.01 \mu F$	≤7.0%	0402	≤25V	$C \leq 0.47 \mu F$	≤7.0%	>25V	$C \geq 0.47 \mu F$	≤10%	≤25V	$C \leq 0.1 \mu F$	≤7.0%	>25V	$C > 0.1 \mu F$	≤10%	0603	≤25V	$C \leq 0.47 \mu F$	≤7.0%	>25V	$C \geq 0.47 \mu F$	≤10.0%	≤25V	$C \leq 0.1 \mu F$	≤5.0%	>25V	$0.1 \mu F < C \leq 0.22 \mu F$	≤7.0%	>25V	$C > 0.22 \mu F$	≤10%	0805	≤25V	$C \leq 1 \mu F$	≤7.0%	>25V	$C > 1 \mu F$	≤10.0%	≤25V	$C \leq 0.47 \mu F$	≤7.0%	>25V	$C > 0.47 \mu F$	≤10.0%	1206	≤25V	$C < 2.2 \mu F$	≤7.0%	>25V	$2.2 \mu F \leq C < 47 \mu F$	≤10.0%	≤25V	$C < 1 \mu F$	≤7.0%	>25V	$1 \mu F \leq C < 47 \mu F$	≤10.0%	1210	/	$C < 2.2 \mu F$	≤7.0%				$2.2 \mu F \leq C < 47 \mu F$	≤10.0%		1.0±0.2Vrms, 1KHz±10%, (Cp>10uF,0.5±0.1Vrms, 120±24Hz)			
规格	$U_R$	容量范围	DF																																																																														
0201	≤25V	$C \leq 0.47 \mu F$	≤10%																																																																														
	>25V	$C \leq 0.01 \mu F$	≤7.0%																																																																														
0402	≤25V	$C \leq 0.47 \mu F$	≤7.0%																																																																														
	>25V	$C \geq 0.47 \mu F$	≤10%																																																																														
	≤25V	$C \leq 0.1 \mu F$	≤7.0%																																																																														
	>25V	$C > 0.1 \mu F$	≤10%																																																																														
0603	≤25V	$C \leq 0.47 \mu F$	≤7.0%																																																																														
	>25V	$C \geq 0.47 \mu F$	≤10.0%																																																																														
	≤25V	$C \leq 0.1 \mu F$	≤5.0%																																																																														
	>25V	$0.1 \mu F < C \leq 0.22 \mu F$	≤7.0%																																																																														
	>25V	$C > 0.22 \mu F$	≤10%																																																																														
0805	≤25V	$C \leq 1 \mu F$	≤7.0%																																																																														
	>25V	$C > 1 \mu F$	≤10.0%																																																																														
	≤25V	$C \leq 0.47 \mu F$	≤7.0%																																																																														
	>25V	$C > 0.47 \mu F$	≤10.0%																																																																														
1206	≤25V	$C < 2.2 \mu F$	≤7.0%																																																																														
	>25V	$2.2 \mu F \leq C < 47 \mu F$	≤10.0%																																																																														
	≤25V	$C < 1 \mu F$	≤7.0%																																																																														
	>25V	$1 \mu F \leq C < 47 \mu F$	≤10.0%																																																																														
1210	/	$C < 2.2 \mu F$	≤7.0%																																																																														
		$2.2 \mu F \leq C < 47 \mu F$	≤10.0%																																																																														

备注：测试温度：25°C ±3°C， 测试湿度：<70%RH. 针对二类介质规格需去老化处理，条件：电容器在 150°C热处理 1 小时，放置 48h 后进行测量。

## 6.5 绝缘电阻 Insulation Resistance

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S	$U_R \leq 50V$ , 大于 $10 G\Omega$ 或 $100\Omega \cdot F / CR$ (大于其中较小的数值) $U_R \leq 50V$ , More than $10 G\Omega$ or $100\Omega \cdot F / CR$ , whichever is smaller.	$U_R \leq 50V$ $U_{测}=U_R$ ; 充电时间: $60 \pm 5$ 秒 温度: $25^\circ C$ Charge Time: $60 \pm 5$ sec Temperature: $25^\circ C$
COG/X7R/X7T /X6S/X7S	$U_R > 50V$ , 大于 $4G\Omega$ 或 $100\Omega \cdot F / CR$ (大于其中较小的数值) $U_R > 50V$ , More than $4 G\Omega$ or $100\Omega \cdot F / CR$ , whichever is smaller.	$U_R \leq 400V$ $U_{测}=U_R$ $U_R > 400V$ $U_{测}=400V$ ; 充电时间: $60 \pm 5$ 秒 温度: $25^\circ C$ Charge Time: $60 \pm 5$ sec Temperature: $25^\circ C$

备注: 测试温度:  $25^\circ C \pm 3^\circ C$ , 测试湿度:  $< 70\% RH$ .


## 6.6 耐电压 Dielectric Strength

类型 Dielectrics	额定电压范围 Rated voltage range	耐电压性能测试方法 Measuring Method
COG	$U_R \leq 50V$	施加额定电压的 300%, 5 秒, 最大电流不超过 50mA Force 300% Rated voltage for 5second. Max..current should not exceed 50 mA.
X7R/X5R/X7T /X6S/X7S	$U_R \leq 50V$	施加额定电压的 250%, 5 秒, 最大电流不超过 50mA Force 250% Rated voltage for 5second. Max..current should not exceed 50 mA.
COG/X7R/X7T/X7S	$100V \leq U_R < 500V$	施加额定电压的 200%, 5 秒, 最大电流不超过 50mA Force 200% Rated voltage for 5second. Max..current should not exceed 50 mA.
	$500V \leq U_R < 1000V$	施加额定电压的 150%, 5 秒, 最大电流不超过 50mA Force 150% Rated voltage for 5second. Max..current should not exceed 50 mA.
	$1000V \leq U_R < 2000V$	施加额定电压的 150%, 5 秒, 最大电流不超过 50mA Force 150% Rated voltage for 5second. Max..current should not exceed 50 mA.
	$U_R \geq 2000V$	施加额定电压的 120%, 5 秒, 最大电流不超过 30mA Force 120% Rated voltage for 5second. Max..current should not exceed 30 mA.

## 6.7 静电容量温度特性 Temperature Coefficient of Capacitance

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition				
COG	容量变化在±30ppm/ °C 以内 容量漂移在±0.2% 或±0.05pF 以内 Temperature coefficient within ±30ppm/ °C; Cp drift within ±0.2% or ±0.05pF	按系列温度顺序测试电容容量 Measure capacitance under follow table list temperature: 在 140~150°C 预处理 1 小时，放置 24h 后进行测量。				
		步骤 STEP	COG, X7R,X7T	X6S	X5R	X7S
		1	25 ±2	25 ±2	25 ±2	25 ±2
		2	-55±3	-55±3	-55±3	-55±3
		3	25 ±2	25 ±2	25 ±2	25 ±2
X7R/X5R	容量变化在±15% 以内 Capacitance change within ±15%	4	125±3	105±3	85±3	125±3
		5	25 ±2	25 ±2	25 ±2	25 ±2
X7T	容量变化在+22%, -33% 以内 Capacitance change within +22%, -33%	1) COG 容量漂移的计算方法为：用步骤 3 测量的电容容值量除以在第 1、3 和 5 步骤测量得到的误差的最大值和最小值的差。 温度系数的计算以第 3 步骤测量电容容量为参考。 2) X7R、X5R、X7T、X6S 和 X7S 与 25°C 时的电容容量相比较，电容容量在温度范围内的变化在要求的范围之内。				
X6S/X7S	容量变化在±22% 以内 Capacitance change within ±22%					
备注：0201/223 及以上、0402/104 及以上规格、0603/334 及以上规格、0805/105 及以上规格、 1206/1210 225 及以上规格，测试电压：<0.5V。						

## 6.8 附着力 Adhesion

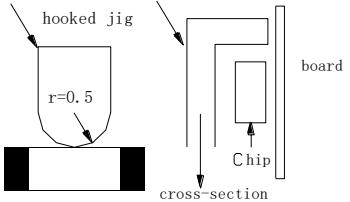类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S	端电极无松动，也无其它不良现象 No removal of the terminations or other defect shall occur.	施加 6N 的压力，并保持 10±1 秒 The pressurizing force shall be 6N (=600g*f) and the duration of application shall be 10±1sec. 


## 6.9 可焊性 Solderability of Termination

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S	端电极挂锡面积不小于 95%，针孔或粗糙面积小于 5% 95% min. coverage of both terminal electrodes and less than 5% have pin holes or rough spots.	锡炉温度: 245±5 °C 浸入时间: 2±1 秒 两侧端电极完全浸入焊锡炉 Solder temperature: 245±5 °C Dipping time: 2±1 second s. Completely soak both terminal electrodes in solder

## 6.10 耐焊性 Resistance to leaching

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG/X7R/X5R /X7T/X6S/X7S	端电极挂锡面积不小于 95%，针孔或粗糙面积小于 5%，外观无开裂 95% min. coverage of both terminal electrodes and less than 5% have pin holes or rough spots. No remarkable visual damage.	预热: 120°C~150°C/60 秒 锡炉温度: 270±5 °C 浸入时间: 10±1 秒 两侧端电极完全浸入焊锡炉 Solder temperature: 270±5 °C preheated: 120°C~150°C/60sec Dipping time: 10±1 seconds. Completely soak both terminal electrodes in solder

## 6.11 端电极结合强度 Bending

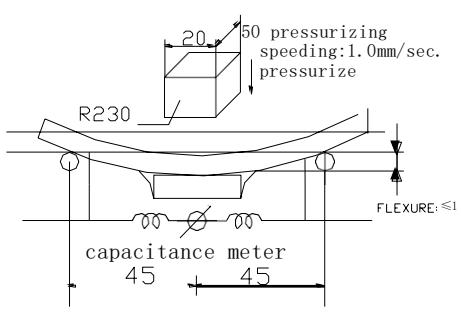类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	无可见损伤; 容量变化小于等于± 5% 或± 0.5pF (取较大值)  No remarkable visual damage Cp change within ±5.0% or ±0.5pF, whichever is larger.	<p>将片状电容器安装在测试夹具上, 按图所示方向以 1.0mm/s 的速率施加压力, 弯曲 1mm。                      Solder the capacitor on testing substrate and put it on testing stand. The middle part of substrate shall successively be pressurized by pressuring rod at a rated of about 1.0mm/sec. Until the deflection become means of the 1.0mm.</p> 
X7R/X5R/X7T /X6S/X7S	无可见损伤; 容量变化小于等于±1 0%  No remarkable visual damage Cp change ≤ ±10%	

## 6.12 耐焊接热 Resistance to Soldering Heat

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	<p>无明显可见损伤 容量变化在<math>\pm 2.5\%</math> 或<math>\pm 0.25\text{pF}</math> (取较大值) 以内 DF 满足产品初始值的要求 IR 满足产品初始值的要求</p> <p>No remarkable visual damage Cp change within <math>\pm 2.5\%</math> or <math>\pm 0.25\text{pF}</math>, whichever is larger. DF meets initial standard value. IR meets initial standard value.</p>	<p>焊接温度: <math>270 \pm 5^\circ\text{C}</math> 预热: <math>120 \sim 150^\circ\text{C}</math> 60 秒 浸入时间: <math>10 \pm 1</math> 秒 在室温下放置 <math>24 \pm 2</math> (COG) 或 <math>48 \pm 4</math> (X7R、X5R、X7S、X7T、X6S) 小时以后测量 试验后在标准条件下恢复</p> <p>*高介电常数电容器的初始值测量 在 <math>140 \sim 150^\circ\text{C}</math> 进行 1 小时的热处理后在室温下放置 <math>48 \pm 4</math> 小时 测量初始值</p> <p>Soldering temperature: <math>270 \pm 5^\circ\text{C}</math> Preheating: <math>120 \sim 150^\circ\text{C}</math> 60sec. Dipping time: <math>10 \pm 1</math> seconds. Measurement to be made after being kept at room temperature for <math>24 \pm 2</math> (COG) or <math>48 \pm 4</math> (X7R, X5R, X7S, X7T, X6S) hours. Recovery for the following period under the standard condition after test.</p>
X7R/X5R/X7T /X6S/X7S	<p>无明显可见损伤 容量变化在<math>\pm 7.5\%</math> 以内 DF 满足产品初始值的要求 IR 满足产品初始值的要求</p> <p>No remarkable visual damage Cp change within <math>\pm 7.5\%</math> DF meets initial standard value. IR meets initial standard value.</p>	<p>*Initial measurement for high dielectric constant type Perform a heat treatment at <math>140 \sim 150^\circ\text{C}</math> for 1hr and let sit for <math>48 \pm 4</math> hrs at room temperature. Perform the initial measurement.</p>

### 6.13 温度快速循环 Temperature Cycle

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition		
COG	无明显可见损伤 容量变化在±2.5% 或 ±0.25pF (取较大值) 以内  No remarkable visual damage Cp change within ±2.5% or ±0.25pF, whichever is larger.	按下列步骤进行 5 次循环: To perform 5 cycles of the stated environment		
		步 骤 Step	温 度 Temperature	时 间 Time
		1	下限类别温度 +0/-3°C	30min
		2	25°C	2~3 min
X7R/X5R/X7T /X6S/X7S	无明显可见损伤 容量变化在±7.5% 以内  No remarkable visual damage Cp change within ±7.5%	3	上限类别温度 +3/-0°C	30 min
		4	25°C	2~3 min
		在室温下放置 48±4 X 7R, X5R, X7S、X7T、X6S) 小时以后测量 *高介电常数电容器的初始值测量 在 140~150°C 进行 1 小时的热处理后 在室温下放置 48±4 小时 测量初始值 Measurement to be made after being kept at room temperature for 24±2hrs (COG) or 48±4hrs (X7R, X5R, X7S、X7T、X6S) at room temperature, then measure. *Initial measurement for high dielectric constant type Perform a heat treatment at 140~150 °C for 1hr and let sit for 48±4hrs at room temperature. Perform the initial measurement.		

### 6.14 稳态湿热 Moisture Resistance ,steady state

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	<p>外观无明显可见损伤 容量变化在±5%或 ±0.5pF (取较大值) 以内 <math>C_p &lt; 10\text{pF}</math>, <math>Q \geq 200+10C_p</math>; <math>10 \leq C_p &lt; 30\text{pF}</math>, <math>Q \geq 275+2.5C_p</math> <math>C_p \geq 30\text{pF}</math>, <math>Q \geq 350</math> IR: 大于 <math>1000M\Omega</math> 或 <math>10\Omega \cdot F</math>(取较小值)</p> <p>No remarkable visual damage <math>C_p</math> change within ±5% or ±0.5pF, whichever is larger. <math>C_p &lt; 10\text{pF}</math>, <math>Q \geq 200+10C_p</math>; <math>10 \leq C_p &lt; 30\text{pF}</math>, <math>Q \geq 275+2.5C_p</math> <math>C_p \geq 30\text{pF}</math>, <math>Q \geq 350</math> <math>R \cdot C \geq 1000M\Omega</math> or <math>10\Omega \cdot F</math>, whichever is smaller</p>	<p>测试温度: <math>40 \pm 2</math> °C 湿度: 90~95% RH 测试时间: <math>500 \pm 12</math>hrs</p> <p>在室温下放置 <math>24 \pm 2</math> (COG) 或 <math>48 \pm 4</math> (X7R、X5R、X7S、X7T、X6S) 小时以后测量</p> <p>*高介电常数电容器的初始值测量在 <math>140 \sim 150</math> °C 进行 1 小时的热处理后 在室温下放置 <math>48 \pm 4</math> 小时 测量初始值</p> <p>Test temperature: <math>40 \pm 2</math> °C Humidity: 90~95% RH Testing time: <math>500 \pm 12</math>hrs</p> <p>Measurement to be made after being kept at room temperature for <math>24 \pm 2</math> hrs (COG) or <math>48 \pm 4</math> hrs (X7R, X5R, X7S, X7T, X6S)</p> <p>*Initial measurement for high dielectric constant type Perform a heat treatment at <math>140 \sim 150</math> °C for 1hr and let sit for <math>48 \pm 4</math> hrs at room temperature. Perform the initial measurement.</p>
X7R/X5R/X7T /X6S/X7S	<p>外观无明显可见损伤 容量变化在±12.5%以内 DF 为初始值的 2 倍以下 IR: 大于 <math>1000M\Omega</math> 或 <math>10\Omega \cdot F</math>(取较小值)</p> <p><math>C_p</math> change within ±12.5% DF: Not more than 2 times of initial value <math>R \cdot C \geq 1000M\Omega</math> or <math>10\Omega \cdot F</math>, whichever is smaller</p>	

### 6.15 耐湿负荷 Damp heat with load

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	外观无明显可见损伤 容量变化在 $\pm 7.5\%$ 或 $\pm 0.75\text{pF}$ (取较大值)以内 $C_p < 30\text{pF}, Q \geq 100 + 10/3 * C_p$ $C_p \geq 30\text{pF}, Q \geq 200$ IR: 大于 $500\text{M}\Omega$ 或 $5\Omega \cdot \text{F}$ (取较小值) No remarkable visual damage $C_p \text{ change} \leq \pm 7.5\% \text{ or } \pm 0.75\text{pF}$ , whichever is larger. $C_p < 30\text{pF}, Q \geq 100 + 10/3 * C_p$ $C_p \geq 30\text{pF}, Q \geq 200$ $R * C \geq 500\text{M}\Omega \text{ or } 5\Omega \cdot \text{F}$ , whichever is smaller	测试温度: $40 \pm 2^\circ\text{C}$ 湿度: 90~95% RH 电压: 额定电压 测试时间: $500 \pm 12\text{hrs}$  在室温下放置 $24 \pm 2$ (COG) 或 $48 \pm 4$ (X7R、X5R、X7S、X7T、X6S) 小时以后测量  *在 $40 \pm 2^\circ\text{C}$ 温度下, 将电容器加额定直流电压 1hrs. 去掉电压, 将电容器在室温下放置 $48 \pm 4\text{hrs}$ 测量初始电容值。
X7R/X5R/X7T /X6S/X7S	外观无明显可见损伤 容量变化在 $\pm 12.5\%$ 以内 DF 为初始值的 2 倍以下 IR: 大于 $500\text{M}\Omega$ 或 $5\Omega \cdot \text{F}$ (取较小值) No remarkable visual damage $C_p \text{ change} \leq \pm 12.5\%$ DF: Not more than 2 times of initial value $R * C \geq 500\text{M}\Omega \text{ or } 5\Omega \cdot \text{F}$ , whichever is smaller	Test temperature: $40 \pm 2^\circ\text{C}$ Humidity: 90~95% RH Voltage: 100% of the rated voltage Testing time: $500 \pm 12\text{hrs}$  Measurement to be made after being kept at room temperature for $24 \pm 2\text{hrs}$ (COG) or $48 \pm 4\text{hrs}$ (X7R, X5R, X7S, X7T, X6S)  *Apply the rated DC voltage for 1 hour at $40 \pm 2^\circ\text{C}$ . Remove and let sit for $48 \pm 4\text{hrs}$ at room temperature. Perform the initial measurement.
备注: 该项可靠性试验仅适用于常规产品, 不适用于中高压产品。		

## 6.16 耐久性 Life Test

类型 Dielectrics	技术要求 Specification	测试条件 Testing Condition
COG	<p>外观无明显可见损伤 容量变化在<math>\pm 3\%</math>或<math>\pm 0.3\text{pF}</math> (取较大值) 以内 容量在 30pF 以上, <math>Q \geq 350</math> 容量在 10pF 以上且小于 30 pF , <math>Q \geq 275 + (2.5 * C_p)</math> 容量小于 10pF, <math>Q \geq 200 + 10 * C_p</math> IR: 大于 <math>1000\text{M}\Omega</math> 或 <math>5\Omega \cdot \text{F}</math>(取较小值) No remarkable visual damage <math>C_p</math> change <math>\leq \pm 3\%</math> or <math>\pm 0.3\text{pF}</math>, whichever is larger. <math>Q \geq 350</math> (<math>C_p \geq 30\text{ pF}</math>) <math>Q \geq 275 + (2.5 * C_p)</math> (<math>10\text{ pF} \leq C_p &lt; 30\text{ pF}</math>) <math>Q \geq 200 + 10 * C_p</math> (<math>C_p &lt; 10\text{ pF}</math>) <math>R * C \geq 1000\text{M}\Omega</math> or <math>5\Omega \cdot \text{F}</math>, whichever is smaller</p>	<p>测试温度: 上限类别温度<math>\pm 3\text{ }^\circ\text{C}</math> 电压: <math>U_R &lt; 100\text{V}</math> 1.5 倍额定电压(*见备注) 测试时间: 1000 小时</p> <p>在室温下放置 <math>24 \pm 2</math> (COG) 或 <math>48 \pm 4</math> (X7R、X5R、X7S、X7T、X6S) 小时以后测量</p> <p>*高介电常数电容器的初始值测量 在上限类别温度<math>\pm 3\text{ }^\circ\text{C}</math>, 将电容器加 1.5 倍额定直流电压 1 小时 去掉电压, 将电容器在室温下放置 48<math>\pm</math>4hrs 测量初始电容值</p> <p>Test temperature: Max. Operating Temp. <math>\pm 3\text{ }^\circ\text{C}</math> Voltage: <math>U_R &lt; 100\text{V}</math> 150% of the rated voltage (*Remarks) Testing time: 1000 hrs</p>
X7R/X5R/X7T /X6S/X7S	<p>外观无明显可见损伤 容量变化在<math>\pm 12.5\%</math> 以内 DF 为初始值的 2 倍以下 IR: 大于 <math>1000\text{M}\Omega</math> 或 <math>5\Omega \cdot \text{F}</math>(取较小值) No remarkable visual damage <math>C_p</math> change <math>\leq \pm 12.5\%</math> DF: Not more than 2 times of initial value <math>R * C \geq 1000\text{M}\Omega</math> or <math>5\Omega \cdot \text{F}</math>, whichever is smaller</p>	<p>Measurement to be made after being kept at room temperature for <math>24 \pm 2</math> hrs (COG) or <math>48 \pm 4</math> hrs (X7R, X5R, X7S, X7T, X6S)</p> <p>*Initial measurement for high dielectric constant type Apply 150% of the rated DC voltage for one hour at the maximum operating temperature <math>\pm 3\text{ }^\circ\text{C}</math>. Remove and let sit for 48<math>\pm</math>4hrs at room temperature. Perform the initial measurement</p>
备注: 该项可靠性试验仅适用于常规产品, 不适用于中高压产品。		
备注*: 0201、0402/104 及以上规格、0603/105 及以上规格、0805/225 及以上规格、1206/475 及以上规格、1210/225 及以上规格, 按照 1 倍额定电压测试。		

## 7. 产品包装 Packing


### 7.1 袋式散装 Bulk Packing

10000 个/袋或按客户要求。Standard packing 10Kpcs/bag; others are according to customer request.

### 7.2 编带式包装 Tape Packing

规格 Type	尺寸 Size (mm)			编带数量(个/盘 pcs/reel)	
	长度 L	宽度 W	厚度 T	纸带 Paper Tape	塑料带 Plastic Tape
0201	0.6	0.3	0.3	15,000	N/A
0402	1.0	0.5	0.5	10,000	N/A
0603	1.6	0.8	0.8	4,000	N/A
0805	2.0	1.25	≤0.85	4,000	N/A
			>0.85	N/A	2,000 (或 3,000)
1206	3.2	1.6	≤0.85	4,000	N/A
			>0.85	N/A	2,000 (或 3,000)
1210	3.2	2.5	≤1.25	N/A	2,000
			>1.25	N/A	2,000

#### 7.2.1 纸带尺寸 Dimensions of Packing Paper

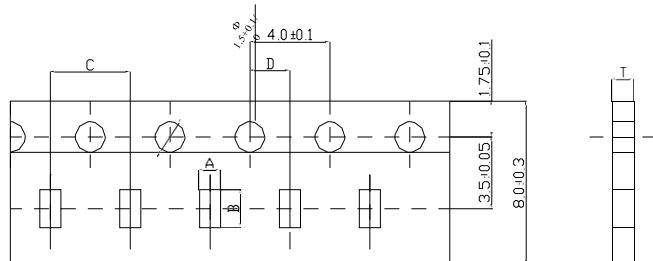


Type	A	B	C	D	T
0201	0.36±0.03	0.67±0.03	2.0±0.10	2.0±0.05	0.42max
0402	0.65±0.10	1.15±0.10	2.0±0.05	2.0±0.05	0.8max
0603	1.05±0.10	1.85±0.10	4.0±0.10	2.0±0.10	1.1max
0805	1.55±0.15	2.3±0.15	4.0±0.10	2.0±0.10	1.1max
1206	1.95±0.15	3.5±0.15	4.0±0.10	2.0±0.10	1.1max


(单位 unit:毫米 mm)

## 7.2.2 塑料带尺寸 Dimensions of Embossed Packing

8mm宽, 4mm间距编带

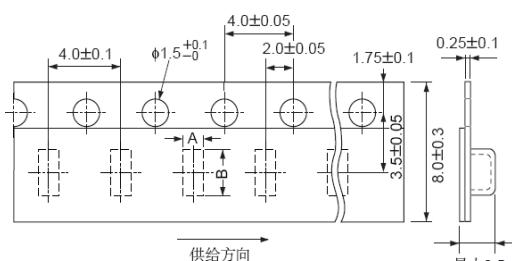


12mm宽, 8mm/4mm间距编带

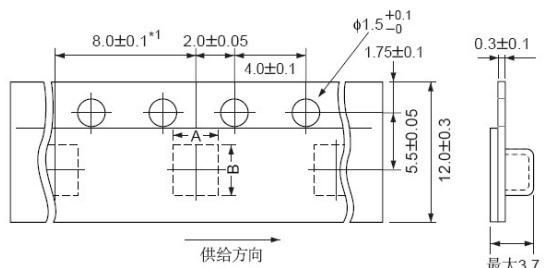


(单位 unit: 毫米 mm)


## 7.2.3 编带盘尺寸 Dimensions of Reel

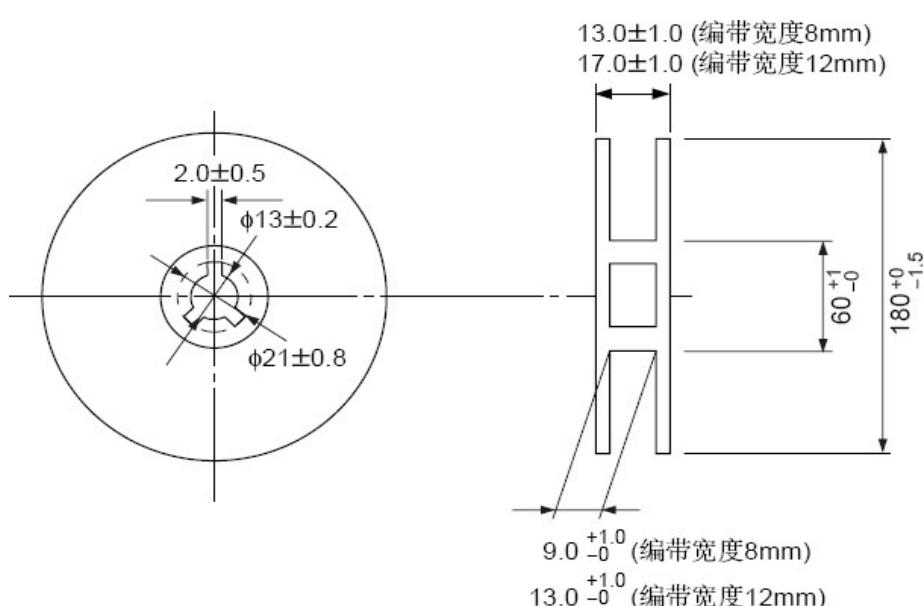

## 7.2.4 编带方式 Taping Figure

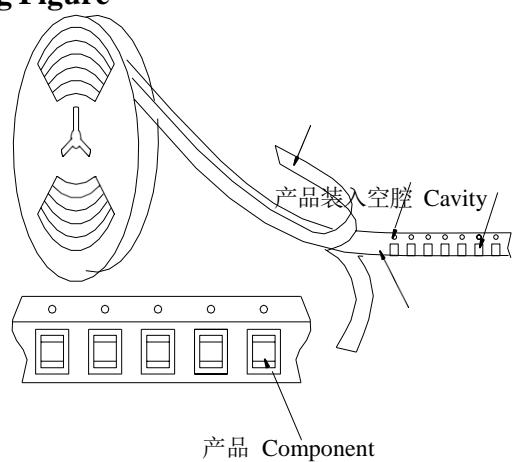


空白部分 Empty section 产品装入部分 Chip insertion section 空白部分 Empty section

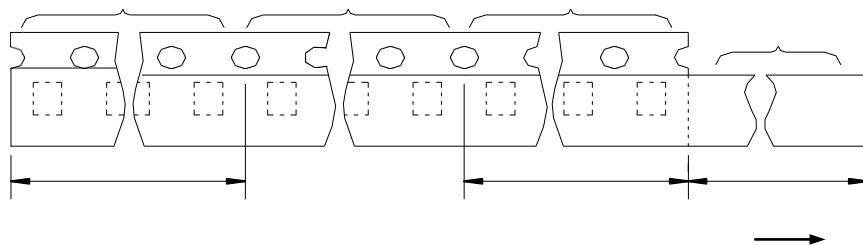


### 7.2.5 编带方法 Taping Method

- ① 包装电容器的编带是顺时针卷绕的，由上往下的方向拉出编带时，传送孔处于编带的右侧。
  - ② 在编带的前端，至少留出 5 个间距的引出带。
  - ③ 在编带时，必须按下图留出引带部分或空白部分。
  - ④ 在盘带的安装中的产品装错的数量每盘必须小于表示数量的 0.1% 或 1 个为限，不连续发生错误。
  - ⑤ 上胶带和下胶带不应超出编带的边缘，不能挡住传送孔。
  - ⑥ 传送孔的累计误差为 10 个间距：±0.3 毫米以内。
  - ⑦ 上胶带的剥离力矩应在 0.1 至 0.6 牛顿以内，其方向如下图所示。
- ①Tapes for capacitors are wound clockwise. The sprocket holes are to the right as the tape is pulled toward the user.  
 ②The top tape and base tape are not attached at the end of the tape for a minimum of 5 pitches.  
 ③Part of the leader and part of the empty tape shall be attached to the end of the tape as follows.  
 ④Missing capacitors number within 0.1% of the number per reel or 1pc, whichever is greater, and are not continuous.  
 ⑤The top tape and bottom tape shall not protrude beyond the edges of the tape and shall not cover sprocket holes.  
 ⑥Cumulative tolerance of sprocket holes, 10 pitches: ±0.3mm.  
 ⑦Peeling off force: 0.1 to 0.6N in the direction shown down.

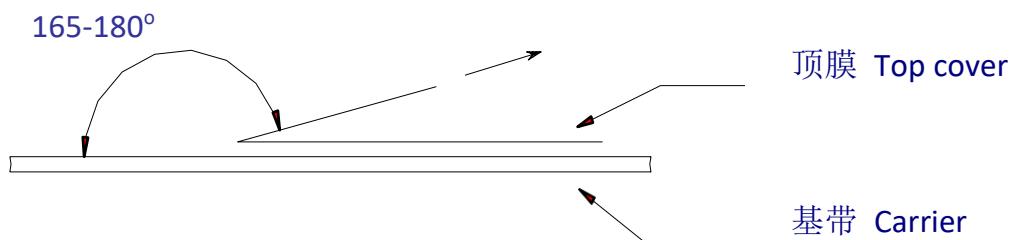

### 7.2.6 产品标签 Reel Label

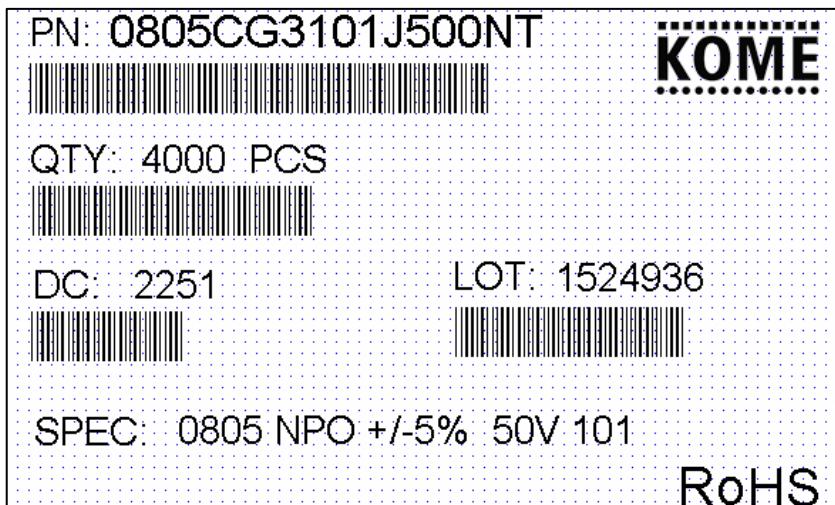

标签内容 The Contents of Label

<u>0805</u>	<u>CG</u>	<u>3</u>	<u>101</u>	<u>J</u>	<u>500</u>	<u>N</u>	<u>T</u>
①	②	③	④	⑤	⑥	⑦	⑧

- ① 尺寸 chip size,
- ② 温度特性 dielectrics,
- ③ total character
- ④ 容量 capacitance,
- ⑤ 容量容差 tolerance,
- ⑥ 额定电压 rated voltage,
- ⑦ 端头材料 TERM INAL MATERIAL STYLES
- ⑧ 包装 packing

### 7.2.7 .外包装 Package

#### 7.2.7.1 包装箱 Carton

##### 7.2.7.1.1 包装箱尺寸 Carton Size

L	W	H
41.0cm	38.5cm	20.2cm

7.2.7.1.2 数量: 240Kpcs /箱 The Quantity: 240Kpcs /one carton

1 内包装盒=40,000PCS 1 INNER BOX=40,000PCS

1 包装箱 =40,000PCS × 6 包装盒=240,000PCS 1 CARTON=40,000PCS × 6 INNER BOX =240,000PCS

RoHS 标识(根据客户要求张贴) according to customer request

**7.2 内包装盒 Inner Box****7.2.7.2.1 包装盒尺寸 Size**

L	W	H
18.5cm	6.5cm	19cm

**7.2.7.2.2 数量: 40Kpcs /盒**

1 盘=4000PCS      1 REEL=4,000PCS

1 包装盒=4,000PCS × 10 盘 =40,000PCS      1 INNER BOX=4,000PCS × 10REEL=40,000PCS

## 8.MLCC 使用注意事项 Precautions on the use of MLCC

### 8.1 电路板设计 PCB Design

#### 8.1.1 电路板图案设计 Design of Land-patterns

下面图和表格给出了部分推荐的设计图案，可以防止安装时焊锡量过多。

同时也给出了不正确的图案。

The following diagrams and tables show some examples recommended patterns to prevent excessive solder amounts (larger fillets which above the component end terminations)

Examples of improper pattern designs are also shown.


电路板设计推荐图案尺寸：

Recommended land dimensions for a typical chip capacitor land patterns for PCBs

波峰焊接时推荐设计的尺寸 (单位: mm):

Recommended land dimensions for wave-soldering (unit: mm)

规格 SIZE		0603	0805	1206
尺寸	L	1.6	2.0	3.2
	W	0.8	1.25	1.6
A	0.8~1.0	1.0~1.4	1.8~2.5	
B	0.5~0.8	0.8~1.5	0.8~1.7	
C	0.6~0.8	0.9~1.2	1.2~1.6	



再流焊接时推荐设计的尺寸 (单位: mm)

Recommended land dimensions for reflow-soldering (unit: mm)

规格 SIZE		0201	0402	0603	0805	1206	1210
尺寸	L	0.6	1.0	1.6	2.00	3.2	3.2
	W	0.3	0.5	0.8	1.25	1.6	2.5
A	0.20~0.25	0.35~0.45	0.6~0.8	0.8~1.2	1.8~2.5	1.8~2.5	
B	0.20~0.30	0.40~0.50	0.6~0.8	0.8~1.2	1.0~1.5	1.0~1.5	
C	0.25~0.35	0.45~0.55	0.6~0.8	0.9~1.6	1.2~2.0	1.6~3.2	

过量的焊锡会影响产品抵抗机械应力的能力，因此在设计图案时应引起注意。

Excess solder can affect the ability of chips to withstand mechanical stresses. Therefore, please take proper precautions when designing land-patterns.

在应用中一些焊接好与坏的情况：

Examples of good and bad solder application

项目 Item	不推荐结构 Not recommended	推荐结构 Recommended
片状元件和带引线的元件的混合焊接 Mixed mounting of SMD and leaded component		
靠近底座的焊接 Component placement close to the chassis		
在片状元件附近带引线元件的焊接 Hand-soldering of leaded components near mounted components		


### 8.1.2 图案结构 Pattern configurations

下面是电容器安装好与坏的例子。选择贴装位置，应尽可能减小电路板在弯曲时受到的机械应力。

The following are examples of good and bad capacitor layout, SMD capacitors should be located to minimize any possible mechanical stresses from board warp or deflection.

	不推荐结构 Not recommended	推荐结构 Recommended
电路板弯曲 Deflection of the board		

对于电路板分拨的电容器，在分拨时受到的机械应力大小与电容器的安装有关。下面推荐了一些好的设计。To layout the capacitors for the breakaway PC board, it should be noted that the amount of mechanical stresses given depending on capacitor layout. The example below shows recommendations for better design.

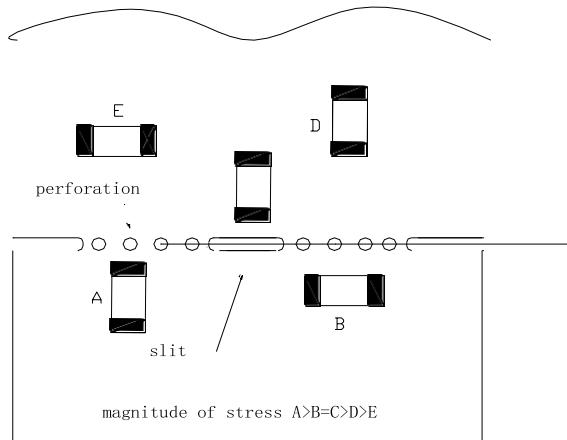





在沿着分拨线分拨电路板时，对产品施加的机械应力与使用的方法关系很大。分折电路板时片状元件受到的疲劳按照如下顺序增大：分折、剪切、V型槽、穿孔。因此，贴装时应该考虑电路板的分拨过程。

When breaking PC boards along their perforations, the amount of mechanical stress on the capacitors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, silt, - grooving, and perforation. Thus, any ideal SMD capacitor layout must also consider the PCB splitting procedure.

## 8.2 自动贴装注意事项 Considerations for automatic placement

### 贴装机的调整 Adjustment of mounting machine

- ①. 产品在电路板贴装时，不应该受到过大的冲击。
  - ②. 必须定期对吸头和定位爪进行检查、维修和更换
- ①. Excessive impact load should not be imposed on the capacitors when mounting the PC boards.
  - ②. The maintenance and inspection of the mounters should be conducted periodically.

	不推荐结构 Not recommended	推荐结构 Recommended
单面贴装 Single-sided mounting		
双面贴装 Double-sided mounting		


### 8.3 推荐焊接曲线 Recommended soldering profile

**8.3.1 说明:** ① 产品推荐使用回流焊接工艺; ② 大尺寸产品适用于回流焊接工艺

Re: ①flow Soldering is recommended; ②flow soldering is suitable for bigger size MLCCs

#### 8.3.2 锡铅焊接曲线 Recommended Sn&Pb soldering profile


##### 回流焊 Reflow soldering

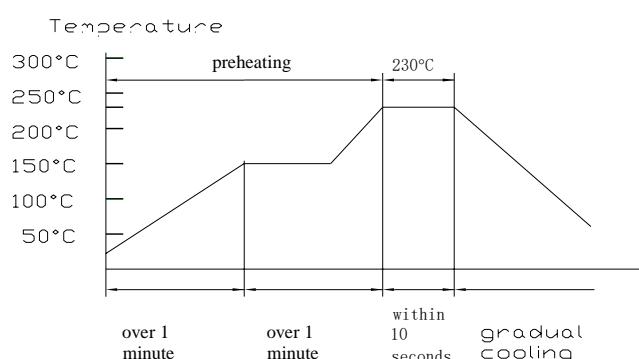

注意 Caution

① . 理想状况的焊锡高度为电容器厚度的  $1/3 \sim 1/2$ , 如下图所示:


①.The ideal condition is to have solder mass (fillet) controlled to  $1/2$  to  $1/3$ of the thickness of the capacitor, as shown below:

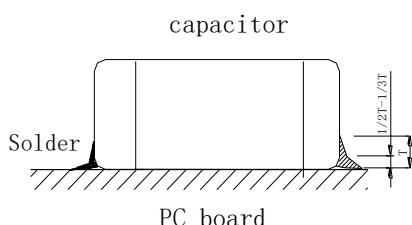

②. 过长的焊接时间会影响端头的可焊性, 焊接时间尽可能保持与推荐时间一致。

②. Because excessive dwell times can detrimentally affect solderability, soldering duration should be kept as close to recommended times as possible.

##### 波峰焊 Wave solder profile

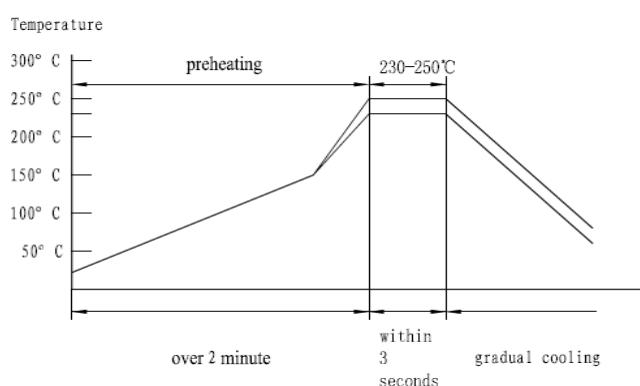

**注意 Caution**

- ② .确保电容器充分预热。
  - ②.产品预热和焊接温度差不超过 150°C。
  - ③.焊接后尽可能慢速冷却。
- ①.Make sure the capacitors are preheated sufficiently.
- ②.The temperature difference between the capacitor and melted solder should not be greater than 100 to 130°C.
- ③. Cooling after soldering should be gradual as possible.


**手工焊接 Hand soldering**

条件:

预热	烙铁头温度	烙铁功率	烙铁头直径	焊接时间	锡膏量	限制条件
Δ≤130°C	最高350°C	最大20W	建议1mm	最长5s	≤1/2芯片厚度	请勿使用烙铁头直接接触陶瓷原件


**注意 Caution**

- ①.用尖端最大直径 1.0mm 功率 20W 的焊接烙铁。
  - ②.焊接烙铁不要直接接触产品。
- ①.Use a 20w soldering iron with a maximum tip diameter of 1.0mm.
- ② .The soldering iron should not directly touch the capacitor.

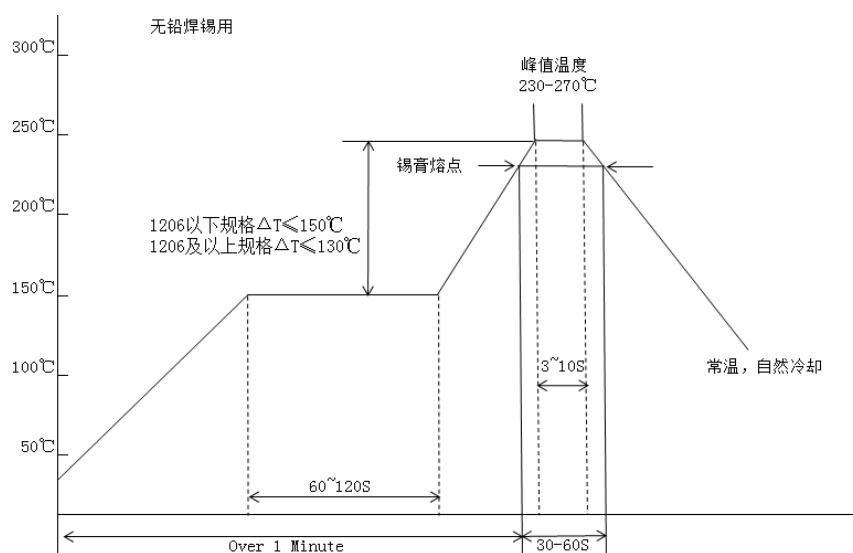**8.3.3 无铅焊接曲线 Recommended Pb-Free soldering profile****回流焊接  
Reflow solder**

产品标准书 SPECIFICATION FOR APPROVAL	编 号 Document No. DRAAW108H/0-2022
-------------------------------------	--------------------------------------

波峰焊接  
Wave solder profile

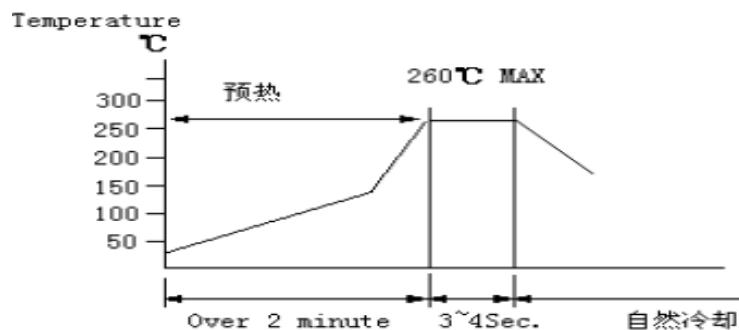

#### 8.4 分拨电路板 Handling

Breakaway PC boards (splitting along perforations)

(1). 在电容器或其它贴装后，必须注意因电路板弯曲或变形带来的应力。

(2). 分拨电路板时必须使用专用的夹具，不可以用手拨断。

(1). When splitting the PC board after mounting capacitors and other components, care is required so as not to give any stresses of deflection or twisting to the board.

(2). Board separation should not be done manually, but by using the appropriate devices.

#### 8.5 保存 Storage

(1). 在下列环境中保存产品：温度 5~40°C；湿度 ≤70% RH

(2). 产品自生产之日起保存期为一年，产品使用之前请勿拆开编带。

(3). 编带拆开后，产品应在三个月内使用。

(4). 高介电常数电容器 (X7R,X5R,Y5V、X7T、X6S) 的容值随时间会逐渐减小，所以在电路设计时应充分考虑这一现象。容值减小的电容器在 150°C 热处理 1 小时后容值会恢复到初始值。

(1). Keep the storage environment conditions as following: Temperature: 5~40°C; Humidity: ≤70% RH

(2). Don't open the tape until the parts are to be used, and store them within one year since the date printed on the reel.

(3). Use the chips within 3 months after the tape is opened.

(4). The capacitance value of high dielectric constant capacitors (X7R,X5R,Y5V、X7T、X6S) will gradually decrease with the passage of time, so this should be taken into consideration in the circuit design. If such a capacitance reduction occurs, a heat treatment of 150°C for 1 hour will return the capacitance to its initial level.

## 相关特性曲线图 Curve diagram of related features

(例) (example) 0603B6104K500NT

